

3

FIG.304.2 PRESSURE RELIEF PIPE-AWAY VALVE




LUPI AUGUSTO TANK & PIPING PRODUCTS ITALY phone: +39 069370701 fax: +39 0697847415

e-mail: info@lupiaugusto.com lupiaugusto@tiscali.it website www.lupiaugusto.com

Technical data	
Design pressure	0.5 Bar
Design temperature	-10/+120 °C
Setting range:	
-pressure	20...1000 mmH2O
EX certificate	
Factory tested:	body pressure 0.7 Bar dimensional correct setting/s leakage API2521
Size	from 2"X3" to 12"X14"
Connections	ANSI 150# RF or UNI PN 10/16 RF
External finiture:	pickled

Dimensions and weights				
DN (xx)	Dimensions (mm)			Weight (kg)
	A	B	H	
2"x3"	260	200	370	15
3"x4"	290	229	400	18
4"x6"	332	285	490	22
6"x8"	401	343	570	26
8"x10"	503	406	700	43
10"x12"	616	483	950	54
12"x14"	637	534	1050	75

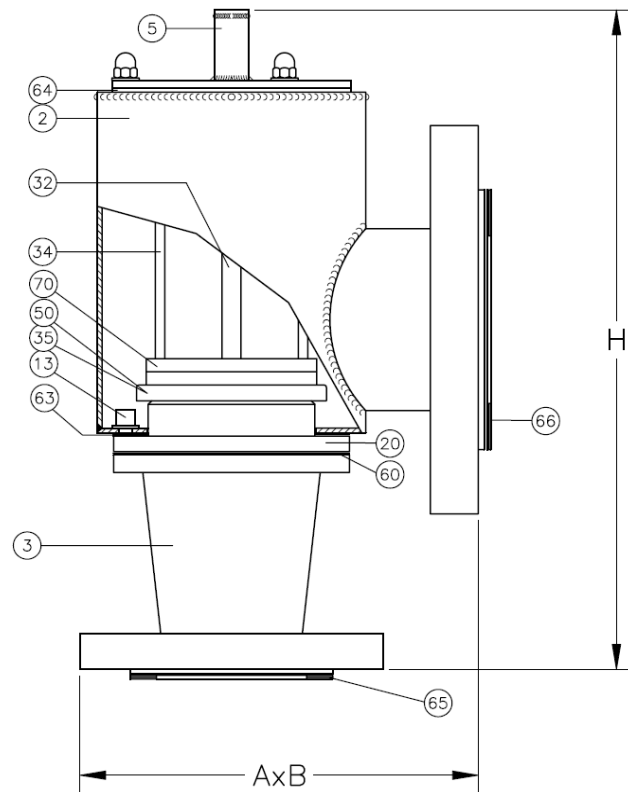

Materials and product codes for Fig.304.2 Pressure Relief Valve, pipe-away

Items	Description	Materials	
2	Conveyor	SS316L	SS316L
3	Nozzle	SS316L	SS316L
5	Cover	SS316L	SS316L
10	Screen	SS304	SS304
13	Body screws	SS316	SS316
20	Seat	SS316	SS316
34	Guide post	SS316	SS316
32	Pallet stem	SS316	SS316
35	Pallet	SS316	SS316
50	Insert	Viton® Teflon®	Teflon®FEP Kalrez®
60	Body gasket	Teflon®	Teflon®
65	Flange gasket	Teflon®	Teflon®
70	Setting weight	Lead	SS304
80	Loose flange	Aluminium	SS304
Product code with ANSI flange/s		304.2.xx.101	304.2.xx.103
Product code with UNI flange/s		304.2.xx.102	304.2.xx.104


Viton® Teflon® Kalrez® are DuPont's™ trademarks. DuPont™ is a trademark of DuPont™ and its affiliates.

Dimensions are for general information only and are subject to change without notice.
© Copyright 2008 LUPI AUGUSTO P.I..00400591004 All rights reserved

Page 300/

3

FIG.304.2 PRESSURE RELIEF PIPE-AWAY VALVE



LUPI AUGUSTO TANK & PIPING PRODUCTS ITALY phone: +39 069370701 fax: +39
0697847415
e-mail: info@lupiaugusto.com lupiaugusto@tiscali.it website www.lupiaugusto.com